



INDUSTRIAL
SCIENTIFIC

VENTIS™ PRO SERIES
Product Guide

BE READY FOR THE MOMENT

In your line of work, a day on the job can turn from habit to hazard in a single moment. Be ready for anything with the Ventis™ Pro Series Multi-Gas Monitors.

With features that keep users safer than ever, the Ventis™ Pro4 and Ventis™ Pro5 make owning and using gas detectors easy—all in the most configurable multi-gas monitors on the market.



Demand More Flexibility From Your Gas Detector

Stop carrying multiple devices to meet your gas detection needs. The Ventis Pro4 and Ventis Pro5 offer a variety of sensor options with flexible slot positions to help you detect combustible and toxic gases across a range of applications.

- Monitor up to five gases with flexible sensor configuration options
- Detect four toxic gases simultaneously in one compact, personal monitor
- Operate the device for personal protection or with a pump for confined space applications
- Save money by using existing compatible Ventis™ MX4 accessories

Alert Others in Emergency Situations

Save precious time in emergency situations by quickly alerting nearby workers when someone is in distress or has lost consciousness.

- Press the dedicated panic button to notify others when an emergency arises
- Set the man-down alarm to activate after a defined period of time without motion

Depend on a Rugged Design

Keep your instruments in the field, not the shop, thanks to an all-new overmold design and Guaranteed for Life™ warranty.

- Industry's only Guaranteed for Life warranty*
- Industry's highest rating of IP68 for protection against damage from dust and water
- Withstands submersion in 1.5 meters of water for one hour
- Replaceable dust filter cover allows you to change dirty filters without having to take apart the instrument
- Raised plastic rail on the faceplate helps to protect sensors when instrument is face down
- High contact areas of the instrument are reinforced to prevent wear from friction

*See specifications chart for full warranty details.





Track Instruments & Alarms

Address recurring alarms, identify hazards, and improve asset management by assigning users and sites to each gas monitor in real time with iAssign™ Technology.

- Quickly make sense of your data by knowing who had an instrument and where it was during an alarm
- Manage assets more efficiently by viewing iAssign data to see who last used an instrument before it went missing
- Keep instruments running optimally with maintenance reminders that prompt you to take actions such as docking or bump testing
- Save time and frustration by using the quick status screen to view battery level, serial number, and installed sensors without powering on the instrument

**INDUSTRIAL
SCIENTIFIC**



Simplify Gas Detection for Your Users

Communicate key safety information to your team, simplify the user's response when an instrument goes into alarm, and reduce nuisance alarms and false evacuations thanks to customizable text options.

- Focus on taking action in emergency situations with custom alarm action messages like "EVACUATE" or "VENTILATE"
- Increase hazard awareness with acknowledgeable gas alerts that provide early warning when gases reach a predefined level
- Reinforce a safety culture by communicating safety information or company-wide reminders with custom start-up messages
- See only the information needed in the field thanks to a flexible interface that lets you limit screens and options when in use
- Focus on the source and type of hazard in emergencies by viewing full-screen alarms

What Gases Will You Need to Monitor?

DETECTION CAPABILITIES	 VENTIS™ PRO4	 VENTIS™ PRO5
Simultaneous Gases	Four	Five
O ₂	✓	✓
LEL/CH ₄	✓	✓
CO	✓	✓
H ₂ S	✓	✓
SO ₂	✓	✓
NO ₂	✓	✓
CO/H ₂ Low	✓	✓
HCN	✓	✓
NH ₃		✓
CO/H ₂ S		✓
CO ₂ /HC IR		✓
CO ₂ /CH ₄ IR		✓



SPECIFICATIONS*

WARRANTY:

Guaranteed for Life. Warranted for as long as the instrument is supported by Industrial Scientific Corporation (excludes sensors, batteries, and filters). O₂, LEL, CO, and H₂S sensors warranted for three years. All other sensors warranted for two years. Pumps and batteries are warranted for two years.

KEYPAD:

Two buttons for operation. Dedicated panic button.

DATA LOG:

At least 3 months at 10-second intervals

EVENT LOGGING:

60 alarm events

INGRESS PROTECTION:

IP68 (submersion at 1.5 meters for 1 hour)

CASE MATERIAL:

Polycarbonate with protective rubber overmold

DIMENSIONS:

104 x 58 x 36 mm (4.1 x 2.3 x 1.4 in) without pump
172 x 67 x 65 mm (6.8 x 2.6 x 2.6 in) with pump

WEIGHT:

200 g (7.05 oz), typical without pump
390 g (13.76 oz), typical with pump

TEMPERATURE RANGE:

-40 °C to 50 °C (-40 °F to 122 °F)

HUMIDITY RANGE:

15%-95% non-condensing (continuous)

DISPLAY/READOUT:

Backlit liquid crystal display (LCD)

POWER SOURCE/RUN TIME:

Rechargeable lithium-ion battery pack with LEL
(12 hours typical @ 20 °C) – without pump
Rechargeable extended-range lithium-ion battery pack with LEL
(24 hours typical @ 20 °C) – without pump
(18 hours typical @ 20 °C) – with pump
Rechargeable lithium-ion battery pack with IR
(36 hours typical @ 20 °C) – without pump
Rechargeable extended-range lithium-ion battery pack with IR
(72 hours typical @ 20 °C) – without pump
(32 hours typical @ 20 °C) – with pump

ALARMS:

Four visual alarm LEDs (two red, two blue);
95 decibel (dB) audible alarm at a distance of 10 cm (3.94 in);
Vibration alarm

SENSORS:

Combustible Gases/Methane – Catalytic Bead
O₂, CO, CO/H₂ low, H₂S, HCN, NH₃, NO₂, SO₂ – Electrochemical
CO₂/HC, CO₂/CH₄ – Infrared

MEASURING RANGES:

CATALYTIC BEAD

Combustible Gases: 0-100% LEL in 1% increments
Methane (CH₄): 0-5% of vol in 0.01% increments

ELECTROCHEMICAL

Ammonia: 0-500 ppm in 1 ppm increments
Carbon Monoxide (CO): 0-2,000 ppm in 1 ppm increments
Carbon Monoxide (CO/H₂ low): 0-1,000 ppm in 1 ppm increments
Carbon Monoxide/Hydrogen Sulfide: CO: 0-1,500 ppm in 1 ppm increments
H₂S: 0-500 ppm in 0.1 ppm increments
Hydrogen Sulfide (H₂S): 0-500 ppm in 0.1 ppm increments
Hydrogen Cyanide: 0-30 ppm in 0.1 ppm increments
Nitrogen Dioxide (NO₂): 0-150 ppm in 0.1 ppm increments
Oxygen (O₂): 0-30% of vol in 0.1% increments
Sulfur Dioxide (SO₂): 0-150 ppm in 0.1 ppm increments

INFRARED

Carbon Dioxide/Hydrocarbons: CO₂: 0-5% vol in 0.01% increments
HC: 0-100% LEL in 1% increments
Carbon Dioxide/Methane: CO₂: 0-5% vol in 0.01% increments
CH₄: 0-5% vol in 0.01% increments
CH₄: 5-100% vol in 0.1% increments

CERTIFICATIONS:

UL: Class I, Division 1, Groups A, B, C, and D, in the Temperature Class T4
Class II, Division 1, Groups E, F, and G, in the Temperature Class T4
Class I, Zone 0, AEx ia IIC, in the Temperature Class T4
Class I, Zone 1, AEx d ia IIC, in the Temperature Class T4, with IR sensor

ATEX: Equipment Group and Category II 1G, Ex ia IIC, with the protection category Ga, in the Temperature Class T4
Equipment Group and Category II 2G, Ex d ia IIC, with the protection category Gb, in the Temperature Class T4, with IR sensor

IECEx: Class I, Zone 0, Ex ia IIC, with the protection technique Ga, in the Temperature Class T4
Class I, Zone 1, Ex d ia IIC, with the protection technique Gb, in the Temperature Class T4, with IR sensor

CSA: Class I, Division 1, Groups A, B, C, and D, in the Temperature Class T4
Class I, Zone 1, Ex d ia IIC, in the Temperature Class T4

SUPPLIED WITH MONITOR:

Calibration Cup (Ventis), Sample Tubing (Ventis with pump), Reference Guide

REFERENCE GUIDE LANGUAGE:

English, French, Spanish, German

* These specifications are based on performance averages and may vary by instrument.

Raise the Bar on Worker Safety with the Ventis Pro Series

Test drive the Ventis Pro with the


INSTRUMENT SIMULATOR

www.indsci.com/VentisProSimulator

Build and price your Ventis Pro online with the

INSTRUMENT BUILDER

www.indsci.com/VentisProBuilder

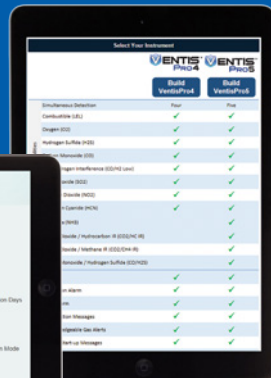

**INDUSTRIAL
SCIENTIFIC**

www.indsci.com/ventispro

AMERICAS

Phone: +1-412-788-4353 | Fax: +1-412-788-8353
1-800-DETECTS (338-3287) North America
info@indsci.com

ASIA PACIFIC

Phone: +65-6561-7377
Fax: +65-6561-7787
info@ap.indsci.com

EMEA

Phone: +33 (0)1 57 32 92 61
Fax: +33 (0)1 57 32 92 67
info@eu.indsci.com